

BRC-443

Difunctional Aliphatic Hydrophobic Urethane Acrylate

Applications

- Coatings and inks for steel
- Coatings and inks for plastic
- Coatings and inks for glass

Features

- Improves adhesion
- Enhances hardness
- Low water absorption
- High temperature resistance

Additional Features

- Increases weatherability
- Provides abrasion resistance
- Low-yellowing
- Provides acid and alkali resistance

BRC-443 is a difunctional, hydrophobic urethane acrylate which can be formulated to be used in heavy-duty industrial and commercial applications. The resulting tough film makes an effective low-yellowing, protective single-coating that extends the substrate's use-life. The low water absorption and acid and alkaline resistance make this oligomer perfect for the following industries: aerospace, appliance, automotive, electronics, industrial, medical device, metal finishing, and UV-curable inks & coatings. BRC-443 exhibits retention of mechanical properties after exposure to high temperatures (200°C for 30 minutes). In addition to the adhesion properties listed in the table below, BRC-443 also shows excellent adhesion to ABS, PVC, PMMA, Nylon-6, and Polystyrene.

| UNCURED PROPERTIES | |
|-----------------------------------|--------|
| Property | Value |
| Viscosity, cP (60°C) | 20,000 |
| Pt-Co (APHA) Color | 20 |
| Refractive Index (25°C) | 1.48 |
| Density, g/cm ³ (25°C) | 1.09 |

| CURED MECHANICAL PROPERTIES | | | | | | |
|--|-------|-------|------|-------|-------|-------|
| Property | I30 | I50 | TM50 | TP50 | H50 | HE30 |
| Tensile Strength, psi** | 1,500 | 1,600 | - | 1,300 | 1,400 | 1,200 |
| Elongation, %** | 220 | 95 | - | 14 | 6.5 | 180 |
| Elastic Modulus, ksi** | 0.8 | 9.5 | - | 25 | 30 | 1.1 |
| Durometer Hardness | 58D | 72D | - | 70D | 74D | 40D |
| Water Absorption, % (24 hrs) | 0.3 | 0.2 | - | 0.4 | 0.3 | 2.4 |
| MEK Double Rubs (#) | 18 | 17 | - | 20 | 14 | 15 |
| Tg(DMA)=34°C; Peak tan delta; cured with 2 phr of Omnirad® 184 | | | | | | |


** Per ASTM D882 - Not Tested || Incompatible X Unable to Measure

| ADHESION PROPERTIES | | | | | | |
|---------------------|-----|-----|------|------|-----|------|
| Substrate | I30 | I50 | TM50 | TP50 | H50 | HE30 |
| ABS | — | — | — | — | — | — |
| Aluminum | ✓✓✓ | ✓✓✓ | — | — | — | — |
| Cold Rolled Steel | ✓✓✓ | ✓✓✓ | — | ✓ | ✓ | — |
| Glass | ✓✓✓ | ✓✓✓ | — | — | — | — |
| HDPE | — | — | — | — | — | — |
| PET | — | — | — | — | — | — |
| PMMA | — | — | — | — | — | — |
| Polycarbonate | ✓✓✓ | ✓✓✓ | — | ✓✓ | ✓✓✓ | — |
| Polypropylene | — | — | — | — | — | — |
| PVC | — | — | — | — | — | — |
| Stainless Steel | ✓✓✓ | ✓✓✓ | — | — | — | — |

✓ Recommended ✓✓ Highly Recommended ✓✓✓ Strongly Recommended

| TYPICAL FORMULATIONS | | | | | | |
|-----------------------|--------|-------|------|-------|-----|-------|
| Test Formulation Name | I30 | I50 | TM50 | TP50 | H50 | HE30 |
| BRC-443 | 70 | 50 | 50 | 50 | 50 | 70 |
| IBOA | 30 | 50 | | | | |
| TMPTA | | | 50 | | | |
| TPGDA | | | | 50 | | |
| HDDA | | | | | 50 | |
| HEMA | | | | | | 30 |
| Omnirad™ 184 | 2 | 2 | 2 | 2 | 2 | 2 |
| Viscosity, 25°C * | 15,000 | 1,700 | - | 1,900 | 800 | 4,200 |

* Brookfield - CAP 2000+ @ 25°C.

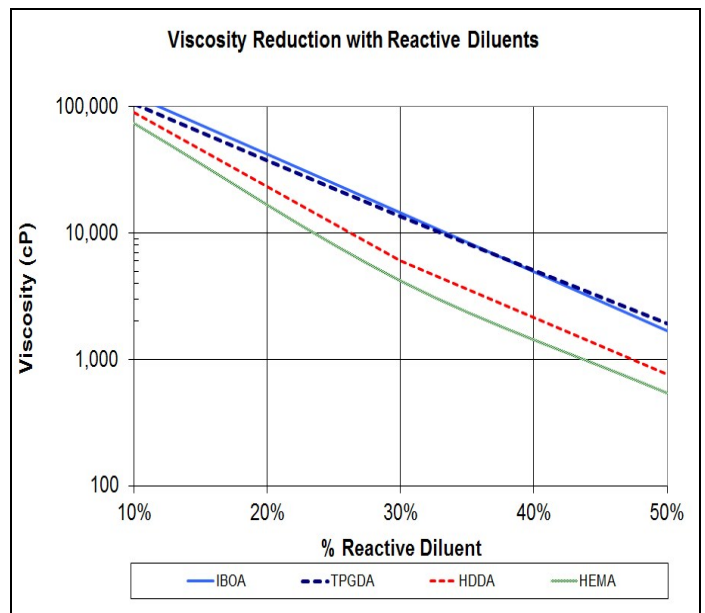

Brookfield - CAP 2000+ @ 25°C

GENERAL INFORMATION

This product is intended for industrial use only. Keep out of the reach of children. Avoid breathing vapors. Avoid contact with skin, eyes, and clothing. Wear impervious gloves. Repeated or continuous skin contact with uncured material may cause irritation. Remove material from skin with soap and water. Never use organic solvents to remove material from skin and eyes. For more information on the safe handling of this material, please refer to the Safety Data Sheet before use. The data provided in this document are based on historical testing that Bomar performed under laboratory conditions as they existed at that time and are for informational purposes only. The data are neither specifications nor guarantees of future performance in a particular application. Bomar does not guarantee that this product's properties are suitable for the user's intended purpose. Numerous factors—including, without limitation, transport, storage, processing, the material with which the product is used, and the ultimate function or purpose for which the product was obtained—may affect the product's performance and/or may cause the product's actual behavior to deviate from its behavior in the laboratory. None of these factors are within Bomar's control. Conclusions about the behavior of the product under the user's particular conditions, and the product's suitability for a specific purpose, cannot be drawn from the information contained in this document. It is the user's responsibility to determine (i) whether a product is suitable for the user's particular purpose or application and (ii) whether it is compatible with the user's intended manufacturing process, equipment, and methods. Under no circumstances will Bomar be liable for determining such suitability or compatibility. Before the user sells any item that incorporates Bomar's product, the user shall adequately and repetitively test the item in accordance with the user's procedures and protocols. Unless specifically agreed to in writing, Bomar will have no involvement in, and shall under no circumstances be liable for, such testing. Bomar makes no warranties, whether express or implied, concerning the merchantability of this product or its fitness for a particular purpose. Nothing in this document should be interpreted as a warranty of any kind. Under no circumstances will Bomar be liable for any injury, loss, expense or incidental or consequential damage of any kind allegedly arising in connection with the user's handling, processing, or use of the product. It is the user's responsibility to adopt appropriate precautions and safeguards to protect persons and property from any risk arising from such handling, processing, or use. The specific conditions of sale for this product are set forth in [Bomar Conditions of Sale](#). Nothing contained herein shall act as a representation that the product use or application is free from patents owned by Bomar or any others. Nothing contained herein shall act as a grant of license under any Bomar Patent. Except as otherwise noted, all trademarks used herein are trademarks of Bomar Specialties, LLC. The "®" symbol denotes a trademark that is registered in the U.S. Patent and Trademark Office. The contents of this document are subject to change. Unless specifically agreed to in writing, Bomar shall have no obligation to notify the user about any change to its content.

Contact Bomarwww.bomar-chem.com | Info@bomar-chem.com

51 Greenwoods Road | Torrington, CT 06790

| USA | +1 860-626-7006